

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088778 A2

- (51) International Patent Classification⁷: **H01M 8/00**
- (21) International Application Number:
PCT/GB2004/001401
- (22) International Filing Date: 1 April 2004 (01.04.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0307623.9 2 April 2003 (02.04.2003) GB
- (71) Applicant (for all designated States except US): **VICTREX MANUFACTURING LIMITED** [GB/GB]; Victrex Technology Centre, Hillhouse International, Thornton Cleveleys, Lancashire FY5 4QD (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **CHARNOCK, Peter** [GB/GB]; 7 Elvaston Road, Carleton, Poulton-Le-Fylde, Lancashire FY6 7TH (GB). **DEVINE, John, Nell** [GB/GB]; 32 Sheringham Way, Poulton Le Fylde, Lancashire FY6 7EE (GB). **WILSON, Brian** [GB/GB]; 1 White Lea, Cabus, Garstang, Lancashire PR3 1JG (GB).
- (74) Agents: **NEILL, Alastair, William et al.**; Appleyard Lees, 15 Clare Road, Halifax HX1 2HY (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POLYMERIC MATERIALS

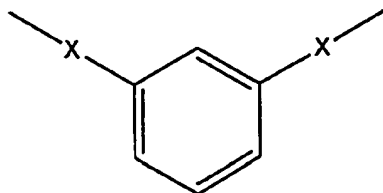

(A)

(57) Abstract: A polymer electrolyte membrane or gas diffusion electrode includes an ion-conducting polymeric material which includes moieties of formula (A) which are substituted on average with more than 1 and 3 or fewer groups (e.g. sulphonate groups) which provide ion-exchange sites and hydrogen atoms of said moieties are optionally substituted, wherein each X in said moieties of formula A independently represent an oxygen or sulphur atom. The ion conducting polymeric material is suitably prepared by controllably sulphonating a polymeric material using about 100% sulphuric acid at 34°C to 36°C.


WO 2004/088778 A2

POLYMERIC MATERIALS


This invention relates to polymeric materials and particularly, although not exclusively, relates to ion-exchange polymeric materials. Preferred embodiments relate to the use of ion-exchange polymeric materials in polymer electrolyte membranes or gas diffusion electrodes of fuel cells.

- 10 One type of polymer electrolyte membrane fuel cell (PEMFC), shown schematically in Figure 1 of the accompanying diagrammatic drawings, may comprise a thin sheet 2 of a hydrogen-ion conducting Polymer Electrolyte Membrane (PEM) sandwiched on both sides by a layer 4 of platinum catalyst and an electrode 6. The layers 2, 4, 6 make up a Membrane Electrode Assembly (MEA) of less than 1mm thickness.

In a PEMFC, hydrogen is introduced at the anode (fuel electrode) which results in the following electrochemical reaction:



The hydrogen ions migrate through the conducting PEM to the cathode. Simultaneously, an oxidant is introduced at the cathode (oxidant electrode) where the following electrochemical reaction takes place:



Thus, electrons and protons are consumed to produce water and heat. Connecting the two electrodes through an

external circuit causes an electrical current to flow in the circuit and withdraw electrical power from the cell.


One important requirement for an ion-exchange polymeric material for a fuel cell or gas diffusion electrode is that it must be capable of being made using a reproducible method wherein a base polymeric material to be provided with ion-exchange sites can be treated so that the ion-exchange sites are introduced into the base polymeric material to a predetermined level at predetermined positions (and substantially at no positions other than the predetermined positions) on the polymeric material.

It is an object of embodiments of the present invention to address the aforementioned problem.

Another important requirement for an ion-exchange polymeric material for a fuel cell or gas diffusion electrode is that it must be thermally stable over a long period of use in a fuel cell at relatively high temperatures. If a polymeric material was to relatively easily lose ion-exchange groups then this would reduce the conductivity of the material and adversely affect the performance of the fuel cell.

It is an object of the present invention to produce relatively thermally stable ion-exchange polymeric materials.

According to a first aspect of the present invention, there is provided a polymer electrolyte membrane or gas diffusion electrode which includes an ion-conducting polymeric material which includes moieties of formula

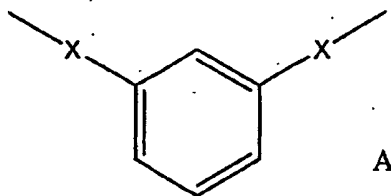

which are substituted on average with more than 1 and 3 or
5 less groups (e.g. sulphonate groups) which provide ion-
exchange sites and hydrogen atoms of said moieties are
optionally substituted, wherein each X in said moieties of
formula A independently represent an oxygen or sulphur
atom.

10

Ion-conducting polymeric materials of the type described
have been found to be surprisingly thermally stable.
Additionally, increasing the number of electron
withdrawing groups on the phenyl ring of repeat unit of
15 formula A may advantageously increase the acidity of the
repeat unit.

Said moieties of formula A may be substituted on average
with at least 1.5, preferably at least 1.8, more
20 preferably at least 1.9 of said groups. Preferably, said
moieties are substituted on average with 1.8 to 2.2, more
preferably 1.9 to 2.1 of said groups which provide ion-
exchange sites. Preferably, substantially all of said
moieties of formula A are di-substituted with groups which
25 provide ion-exchange sites.


Preferably, hydrogen atoms of said moieties other than
those substituted with groups to provide ion-exchange
sites as described are not substituted.

Said ion-conducting polymeric material is preferably of a type which includes:


- (i) phenyl moieties;
- 5 (ii) carbonyl and/or sulphone moieties; and
- (iii) ether and/or thioether moieties.

Said ion-conducting polymeric material may include a moiety of formula

10




and/or a moiety of formula














15

and/or a moiety of formula



20

wherein at least some of the units I, II and/or III are functionalised to provide ion-exchange sites, wherein the phenyl moieties in units I, II, and III are independently optionally substituted and optionally cross-linked; and
5 wherein m, r, s, t, v, w and z independently represent zero or a positive integer, E and E' independently represent an oxygen or a sulphur atom or a direct link, G represents an oxygen or sulphur atom, a direct link or a -O-Ph-O- moiety where Ph represents a phenyl group and Ar is selected from
10 one of the following moieties (i)* or (i) to (x) which is bonded via one or more of its phenyl moieties to adjacent moieties



Unless otherwise stated in this specification, a phenyl moiety may have 1,4- or 1,3-, especially 1,4-, linkages to
5 moieties to which it is bonded.

In (i)*, the middle phenyl may be 1,4- or 1,3- substituted.

In (iii), the middle phenyl ring may be 1,3- or 1,4-
10 substituted.

Preferably, each phenyl moiety in the ion-conducting polymeric material has 1,4- linkages, except for moieties of formula A in said material.

5 Suitably, to provide said ion exchange sites, said polymeric material is sulphonated, phosphorylated, carboxylated, quaternary-aminoalkylated or chloromethylated, and optionally further modified to yield $-\text{CH}_2\text{PO}_3\text{H}_2$, $-\text{CH}_2\text{NR}_3^{20+}$ where R^{20} is an alkyl, or $-\text{CH}_2\text{NAr}_3^{x+}$ where
10 Ar^x is an aromatic (arene), to provide a cation or anion exchange membrane. Further still, the aromatic moiety may contain a hydroxyl group which can be readily elaborated by existing methods to generate $-\text{OSO}_3\text{H}$ and $-\text{OPO}_3\text{H}_2$ cationic exchange sites on the polymer.

15

Preferably, said ion-conducting polymeric material is sulphonated. Preferably, the only ion-exchange sites of said ion-conducting polymeric material are sites which are sulphonated.

20

References to sulphonation include a reference to substitution with a group $-\text{SO}_3\text{M}$ wherein M stands for one or more elements selected with due consideration to ionic valencies from the following group: H, NR_4^{y+} , in which R^y
25 stands for H, $\text{C}_1\text{-C}_4$ alkyl, or an alkali or alkaline earth metal or a metal of sub-group 8, preferably H, NR_4^+ , Na, K, Ca, Mg, Fe, and Pt. Preferably M represents H.

Where a moiety A includes at least two groups which provide
30 ion-exchange sites, such groups may be ortho or para to the X-atoms (i.e. the phenyl group of moiety A is 4,6-substituted). Moieties A may not generally be substituted in the position which is meta to both X-atoms.

Preferably, the majority (e.g. at least 80%, preferably at least 90%) of the two groups are arranged ortho or para as described. In some cases, however, it is possible for the
5 phenyl groups to be substituted in the 2,5- positions, but preferably less than 20%, more preferably less than 10% of such groups are 2,5,-substituted.

In some cases, it may be possible to tri-substitute
10 respective A moieties. In this case, the third substituent may be arranged between the two X-atoms in moiety A.

Said polymeric material may include more than one different type of repeat unit of formula I; more than one different
15 type of repeat unit of formula II; and more than one different type of repeat unit of formula III.

Said moieties I, II and III are suitably repeat units. In the polymeric material, units I, II and/or III are suitably
20 bonded to one another - that is, with no other atoms or groups being bonded between units I, II, and III.

Unit A is preferably a part of unit I, II or III.

25 Where the phenyl moieties in units A, I, II or III are optionally substituted, they may be optionally substituted by one or more halogen, especially fluorine and chlorine, atoms or alkyl, cycloalkyl or phenyl groups. Preferred alkyl groups are C₁₋₁₀, especially C₁₋₄, alkyl groups.
30 Preferred cycloalkyl groups include cyclohexyl and multicyclic groups, for example adamantyl. In some cases, the optional substituents may be used in the cross-linking of the polymer. For example, hydrocarbon optional

substituents may be functionalised, for example sulphonated, to allow a cross-linking reaction to take place. Preferably, said phenyl moieties are unsubstituted.

- 5 Another group of optional substituents of the phenyl moieties in units A, I, II or III include alkyls, halogens, C_yF_{2y+1} where y is an integer greater than zero, $O-R^q$ (where R^q is selected from the group consisting of alkyls, perfluoralkyls and aryls), $CF=CF_2$, CN, NO_2 and OH.
- 10 Trifluormethylated phenyl moieties may be preferred in some circumstances. However, as stated, the phenyl moiety in moiety A and in I, II and III when provided are preferably not further substituted.
- 15 Where said polymeric material is cross-linked, it is suitably cross-linked so as to improve its properties as a polymer electrolyte membrane, for example to reduce its swellability in water. Any suitable means may be used to effect cross-linking. For example, where E represents a
- 20 sulphur atom, cross-linking between polymer chains may be effected via sulphur atoms on respective chains. Alternatively, said polymer may be cross-linked via sulphonamide bridges as described in US 5 561 202. A further alternative is to effect cross-linking as described
- 25 in EP-A-0008895. Said ion-conducting polymeric material is preferably not cross-linked.


Where w and/or z is/are greater than zero, the respective phenylene moieties may independently have 1,4- or 1,3-

30 linkages to the other moieties in the repeat units of formulae II and/or III. Preferably, said phenylene moieties have 1,4- linkages.

Preferably, the polymeric chain of the first material does not include a -S- moiety. Preferably, G represents a direct link.


- 5 Suitably, "a" represents the mole % of units of formula I in said polymeric material, suitably wherein each unit I is the same; "b" represents the mole % of units of formula II in said material, suitably wherein each unit II is the same; and "c" represents the mole % of units of formula III
- 10 in said material, suitably wherein each unit III is the same. Preferably, a is in the range 45-100, more preferably in the range 45-55, especially in the range 48-52. Preferably, the sum of b and c is in the range 0-55, more preferably in the range 45-55, especially in the range
- 15 48-52. Preferably, the ratio of a to the sum of b and c is in the range 0.9 to 1.1 and, more preferably, is about 1. Suitably, the sum of a, b and c is at least 90, preferably at least 95, more preferably at least 99, especially about 100. Preferably, said polymeric material consists
- 20 essentially of moieties I, II and/or III, with moiety A being a part of moieties I, II and/or III.

Said polymeric material may be a homopolymer having a repeat unit of general formula



25

or a homopolymer having a repeat unit of general formula

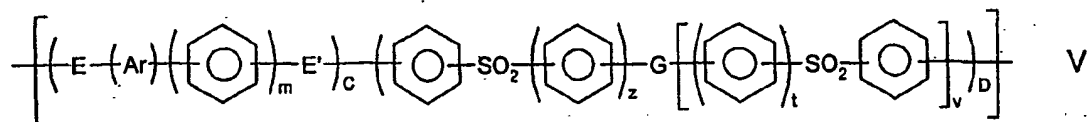


or a random or block copolymer of at least two different units of IV and/or V provided that repeat units (or parts of repeat unit) are functionalised to provide ion-exchange sites;


5

wherein A, B, C and D independently represent 0 or 1 and E, E', G, Ar, m, r, s, t, v, w and z are as described in any statement herein.

- 10 As an alternative to a polymer comprising units IV and/or V discussed above, said polymeric material may be a homopolymer having a repeat unit of general formula



or a homopolymer having a repeat unit of general formula















- 15 or a random or block copolymer of at least two different units of IV* and/or V* provided that one or more repeat units (or parts of repeat units) are functionalised to provide ion-exchange sites; wherein A, B, C, and D independently represent 0 or 1 and E, E', G, Ar, m, r, s, t, v, w and z are as described in any statement herein.
- 20

Preferably, m is in the range 0-3, more preferably 0-2, especially 0-1. Preferably, r is in the range 0-3, more preferably 0-2, especially 0-1. Preferably t is in the range 0-3, more preferably 0-2, especially 0-1.

5 Preferably, s is 0 or 1. Preferably v is 0 or 1. Preferably, w is 0 or 1. Preferably z is 0 or 1.

Preferably Ar is selected from the following moieties (xi)* and (xi) to (xxi):



In (xi)*, the middle phenyl may be 1,4- or 1,3-substituted.

In (xiii), the middle phenyl ring may be 1,3- or 1,4-substituted.

In (xiv), the phenyl group may be 1,3 or 1,4-substituted.

5

Preferably, (xv) is selected from a 1,2-, 1,3-, or a 1,5-moiety; (xvi) is selected from a 1,6-, 2,3-, 2,6- or a 2,7-moiety; and (xvii) is selected from a 1,2-, 1,4-, 1,5-, 1,8- or a 2,6- moiety.

10

Preferably, said ion-conducting polymeric material is crystalline or crystallisable.

Unless otherwise stated in this specification, a reference
15 to a crystalline material extends to any material having at least some crystallinity.

The existence and/or extent of crystallinity in a polymer is preferably measured by wide angle X-ray diffraction,
20 for example as described by Blundell and Osborn (Polymer 24, 953, 1983). Alternatively, Differential Scanning Calorimetry (DSC) could be used to assess crystallinity. The level of crystallinity in said polymeric material may be 0% (e.g. where the material is amorphous or
25 crystallisable); or the level of crystallinity may be at least 0.5%, suitably at least 1%, preferably at least 5% weight fraction, suitably when measured as described by Blundell and Osborn. The level of crystallinity in said polymeric material may be less than 20%.


30

Suitable moieties Ar are moieties (i)*, (i), (ii), (iv) and (v) and, of these, moieties (i)*, (i), (ii) and (iv) are preferred. Preferred moieties Ar are moieties (xi)*, (xi),

(xii), (xiv), (xv) and (xvi) and, of these, moieties (xi)*, (xi), (xii) and (xiv) are especially preferred. Another preferred moiety is moiety (v), especially, moiety (xvi). In relation, in particular to the alternative first
 5 polymeric materials comprising units IV* and/or V*, preferred Ar moieties are (v) and, especially, (xvi).

One preferred class of polymeric materials may include at least some ketone moieties in the polymeric chain. In such
 10 a preferred class, the polymer preferably does not only include -O- and -SO₂- moieties between aryl (or other unsaturated) moieties in the polymeric chain. Thus, in this case, suitably, a polymer of the first aspect does not consist only of moieties of formula III, but also includes
 15 moieties of formula I and/or II.

Said ion-conducting polymeric material preferably includes a repeat unit of formula

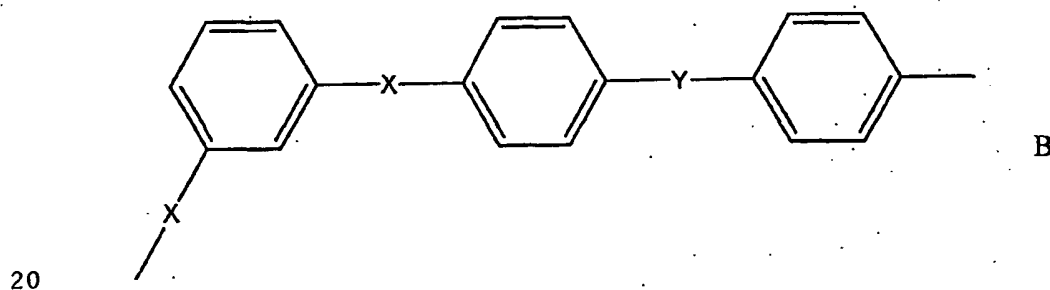

wherein the 1,3- substituted -X-Phenyl-X- moiety is substituted on average with more than 1 and 3 or less groups which provide ion-exchange sites as described
 25 above, each X independently represents an oxygen or sulphur atom as described above, and Y represents a carbonyl or sulphone group. Preferably, Y represents a

carbonyl group. Preferably, each X represents an oxygen atom.

In said ion-conducting polymeric material, moiety A is preferably di-substituted as described. Said ion-conducting polymeric material may include other moieties which are functionalised to provide ion-exchange sites. Said ion-conducting polymeric material may be derived from a precursor polymeric material which is suitably not provided with ion-exchange sites. Said precursor material may include moieties which can relatively easily be functionalised to provide them with ion-exchange sites and moieties which are more difficult to functionalise with ion-exchange sites. Relatively easily functionalised moieties include moiety A described above; and other electron rich, relatively non-deactivated units such as multi-phenylene (e.g. biphenylene) moieties or fused ring aromatic (e.g. naphthalene) moieties which are preferably bonded at each end to oxygen or sulphur atoms. Thus, readily functionalised units are unit A and -O-biphenylene-O- moieties. More difficult to functionalise units include units bonded to sulphone or carbonyl groups (e.g. -O-phenyl-CO and -O-phenyl-SO₂-).

Suitably, any -O-phenyl-CO or -O-phenyl-SO₂ moieties in said ion-conducting polymeric material are functionalised with ion-exchange sites to a level of less than 10 mole%, preferably less than 5 mole%, more preferably less than 1 mole%. Especially preferred is the case wherein said moieties are substantially not functionalised with ion-exchange sites. On the other hand, said relatively easily functionalised units may be functionalised with ion-exchanges sites as described, with unit A being

difunctionalised as described and multi-phenylene units bonded at each end to oxygen or sulphur atoms being at least mono-functionalised on each phenylene moiety.

- 5 When the ion-conducting polymeric material includes moieties of formula A together with -O-biphenylene-O- moieties up to 100 mole% (preferably at least 95 mole%, especially 100 mole%) of moieties A are di-functionalised with ion-exchange sites and up to 100 mole% (preferably at
10 least 95 mole%, especially 100 mole%) of said -O-biphenylene-O- moieties are functionalised with ion-exchange sites.

Preferably, the only moieties in said ion-conducting
15 polymeric material which are functionalised with ion-exchange sites are moieties A and preferably substantially 100 mole% of such moieties are di-functionalised as described.

- 20 Preferred polymers are copolymers comprising a first repeat unit which is selected from the following:

(a) a unit of formula IV wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a
25 moiety of structure (iv), m and s represent zero, w represents 1 and A and B represent 1 provided that said unit includes moiety A, with both X atoms being oxygen atoms (i.e.-ether-phenyl-metaether-phenyl-ketone-phenyl-);

30 (b) a unit of formula V wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (v), m and s represent zero, w represents 1 and A and B represent 1 provided that said unit includes

moiety A, with both X atoms being oxygen atoms (i.e. - ether-phenyl-metaether-phenyl-sulphone-phenyl-);

and a second repeat unit selected from one of the
5 following:

(c) a unit of formula IV wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (iv), m and s represent zero, w represents 1
10 and A and B represent 1 (i.e. -ether-phenyl-ether-phenyl-ketone-phenyl);

(d) a unit of formula IV wherein E represents an oxygen atom, E' represents a direct link, Ar represents a moiety
15 of structure (i), m represents zero, A represents 1, B represents zero (i.e.-ether-phenyl-ketone-phenyl);

(e) a unit of formula V wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety
20 of structure (iv), m and v represent zero, z represents 1 and C and D represent 1 (i.e. -ether-phenyl-ether-phenyl-sulphone-phenyl-);

(f) a unit of formula V wherein E represents an oxygen
25 atom, E' represents a direct link, Ar represents a moiety of structure (ii), m represents 0, C represents 1, D represents 0 (i.e. -ether-phenyl-sulphone-phenyl-);

(g) a unit of formula V wherein E and E' represents an
30 oxygen atom, Ar represents a structure (i), m represents 0, C represents 1, Z represents 1, G represents a direct link, v represents 0 and D represents 1 (i.e. -ether-phenyl-ketone-phenyl-ether-phenyl-sulphone-phenyl-);

(h) a unit of formula IV wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (iv), m represents 1, w represents 1, s represents zero, A and B represent 1 (i.e. -ether-phenyl-phenyl-ether-phenyl-ketone-phenyl-);

(i) a unit of formula IV wherein E represents an oxygen atom, E' is a direct link, G represents a direct link, Ar represents a moiety of structure (iv), m and s represent zero, w represent 1, A and B represent 1 (i.e. -ether-phenyl-phenyl-ketone-phenyl-);

(j) a unit of formula V wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (iv), m represents 1, z represents 1, v represents 0, C and D represent 1 (i.e. -ether-phenyl-phenyl-ether-phenyl-sulphone-);

(k) a unit of formula V wherein E represents an oxygen atom, E' represents a direct link, G represents a direct link, Ar represents a moiety of structure (iv), m and v represent zero, z represents 1, C and D represent 1 (i.e. -ether-phenyl-phenyl-sulphone-phenyl-);

(l) a unit of formula IV wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (v), m represents 0, w represents 1, s represents 0, A and B represents 1 (i.e. -ether-naphthalenyl-ether-phenyl-ketone-phenyl-);

(m) a unit of formula V wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety

of structure (v), m represents 0, z represents 1, v represents 0, C and D represent 1 (i.e. -ether-naphthalenyl-ether-phenyl-sulphone-).

- 5 Said ion-conducting polymeric material may include a third repeat unit which may be selected from the above list of second repeat units.

Preferred ion-conducting polymeric materials include a
10 first unit selected from (a) or (b) in combination with a second unit selected from (d) or (f) optionally in combination with (g) (i.e. -ether-phenyl-metaether-phenyl-ketone-phenyl- or -ether-phenyl-metaether-phenyl-sulphone-phenyl- in combination with -ether-phenyl-ketone-phenyl-
15 or -ether-phenyl-sulphone-phenyl- and, optionally, with -ether-phenyl-ketone-phenyl-ether-phenyl-sulphone-phenyl-.

The most preferred ion-conducting polymeric materials comprise unit (a) in combination with unit (d)
20 i.e. (-ether-phenyl-metaether-phenyl-ketone-phenyl-/-ether-phenyl-ketone-phenyl); unit (a) in combination with units (d) and (g) (i.e. (-ether-phenyl-metaether-phenyl-ketone-phenyl-/-ether-phenyl-ketone-phenyl/-ether-phenyl-ketone-phenyl-ether-phenyl-sulphone-phenyl-); unit (b) in
25 combination with unit (f) (i.e. -ether-phenyl-metaether-phenyl-sulphone-phenyl-/-ether-phenyl-sulphone-phenyl-) and unit (b) in combination with units (f) and (g) (i.e. -ether-phenyl-metaether-phenyl-sulphone-phenyl-/-ether-phenyl-sulphone-phenyl-/-ether-phenyl-ketone-phenyl-
30 ether-phenyl-sulphone-phenyl-).

In general terms, said polymeric material is preferably substantially stable when used as a PEM in a fuel cell.

Thus, it suitably has high resistance to oxidation, reduction and hydrolysis and has very low permeability to reactants in the fuel cell. Preferably, however, it has a high proton conductivity. Furthermore, it suitably has
5 high mechanical strength and is capable of being bonded to other components which make up a membrane electrode assembly.

Said polymeric material may comprise a film, suitably
10 having a thickness of less than 1mm, preferably less than 0.5mm, more preferably less than 0.1mm, especially less than 0.05mm. The film may have a thickness of at least 5µm.

Said polymer electrolyte membrane may comprise one or more layers wherein, suitably, at least one layer comprises a film of said polymer. Said membrane may have a thickness of at least 5 µm and, suitably, less than 1mm, preferably less than 0.5mm, more preferably less than 0.1mm,
20 especially less than 0.05mm.

The polymer electrolyte membrane suitably includes a layer of a catalyst material, which may be a platinum catalyst (i.e. platinum containing) or a mixture of platinum and
25 ruthenium, on both sides of the polymer film. Electrodes may be provided outside the catalyst material.

Said polymer electrolyte or gas diffusion electrode may be for a fuel cell or electrolyte.

30

Said polymer electrolyte membrane may have an equivalent weight (EW) of less than 1000 g/mol, suitably less than 800 g/mol, preferably less than 600 g/mol, more preferably

less than 500 g/mol. Preferably the equivalent weight (EW) is in the range 400-500 g/mol, especially 450-500 g/mol.

According to a second aspect of the invention, there is provided a fuel cell or electrolyser (especially a fuel cell) incorporating a polymer electrolyte membrane according to said first aspect.

Ion-conducting polymeric materials of the type described may have applications other than a part of a polymer electrolyte membrane or gas diffusion electrode. Accordingly, in a third aspect, the invention extends to an ion-conducting polymeric material as described according to said first aspect per se.

15

Said ion-conducting polymeric material of the third aspect may have any feature of the material described according to the first aspect.

The equivalent weight (EW) of the ion-conducting polymeric material may be as described above according to said first aspect. However, the ion-conducting polymer material may be used in situations wherein very low equivalent weight materials may be of utility. For example the EW may be as low as 144.

25

According to a fourth aspect of the invention, there is provided any novel polymer described according to said first or third aspects, in the absence of said groups which provide ion-exchange sites.

30

Polymeric materials as described herein may be made by analogy to the processes described in WO 00/15691 and

hereinafter and the contents of the aforementioned document (especially page 23 line 23 to page 29 line 6) are incorporated herein by reference.

- 5 According to a fifth aspect of the present invention, there is provided a method of making a sulphonated ion-conducting polymeric material as described herein, the method comprising contacting a polymeric material which includes a repeat unit of formula A as described above
10 with a sulphonating agent thereby to substitute the repeat unit on average with more than 1 and 3 or less sulphonate groups.

The method preferably includes predetermining the level of
15 sulphonation required and selecting suitable conditions to effect the sulphonation. Thus, the method suitably involves controllably sulphonating the polymeric material.

Preferred conditions for controllably sulphonating the
20 polymeric material involve the use of sulphuric acid, suitably at a concentration of at least 99.5%, preferably at least 99.8%, more preferably of at least 99.9%. The sulphuric acid concentration is preferably less than 100.1% and preferably about 100%. The temperature is
25 preferably above ambient temperatures and may be 30°C or above, preferably 32°C or above, more preferably 34°C or above. The temperature may be 40°C or less, preferably 38°C or less, especially 36°C or less. A preferred temperature range is 34°C to 36°C with 35°C being
30 preferred. The selected temperature or temperature range may be maintained for at least 2, preferably at least 4, more preferably at least 6, especially at least 7 hours. The temperature or temperature range may be maintained for

less than 20, preferably less than 15, more preferably less than 10, especially less than 9 hours. By selecting a sulphuric acid concentration and temperature of sulphonation as described it is possible to achieve di-
5 sulphonation of substantially all of the moieties of formula A in the polymeric material. Preferred conditions involve use of 99.8% to 100% sulphuric acid (more preferably 100% sulphuric acid) at 34°C - 36°C, suitably for 4 to 10 hours.

10

The method of the fifth aspect is preferably selected so that substantially no difficult to sulphonate units as described above (e.g. phenyl moieties bonded to sulphone or carbonyl groups) are sulphonated.

15

Preferably, in the method, substantially the only moieties in said polymeric material which are provided with ion-exchange sites are said moieties of formula A.

20 Specific embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a representation of a polymer electrolyte
25 membrane fuel cell as referred to above;

Figure 2 is proton-NMR spectrum for a SPEmEK/PEK copolymer.


30 All chemicals referred to were used as received from Sigma-Aldrich Chemical Company, Dorset, UK, unless otherwise stated.

The following materials are referred to hereinafter:

PEEK (Trade Mark) - polyetheretherketone obtained from Victrex plc of England.

5. PEK (Trade Mark) - polyetherketone obtained from Victrex plc of England.

PEmEK - polyether-meta-etherketone



- 10 PEKES - polyetherketoneethersulphone
PEmES - polyether-meta-ethersulphone
PEDEK - polyetherbiphenyletherketone
SPEEK - sulphonated polyetheretherketone
SPEK - sulphonated polyetherketone
- 15 BDF - 4,4'-difluorobenzophenone
DHB - 4,4'-dihydroxybenzophenone
Res - 1,3-dihydroxybenzene
Bis-S- 4,4'-dihydroxydiphenylsulphone
- 20 Examples 1 to 3 describe methods of preparing polymers.
Example 4 describes the exclusive mono-sulphonation of
polymers containing the PEmEK unit.

Example 5 describes a method to produce a range of
25 polymers with greater than 1 but less than 2 sulphonic
acid groups per meta oxysubstituted phenylene rings.

Example 6 describes an NMR procedure whilst example 7
describes sulphonation at increased acid concentrations.

Example 8 describes the exclusive di-sulphonation of PEmEK units within the described copolymers.

Example 9 provides an example of the dissolution but non
5 sulphonation of PEK units under the conditions described in example 8.

Examples 10 and 11 provide evidence that attempts to increase or decrease the temperature in the methods
10 described in example 8 result in the undesired sulphonation of PEK units or the incomplete disulphonation of PEmEK units respectively.

Examples 12 and 13 describe the sulphonation of PEK and
15 PEEK to provide polymers for the thermal stability experiments described in Example 14.

Example 1a - Synthesis of PEmEK/PEK (55:45)

20 A 700ml flanged flask fitted with a ground glass Quickfit lid, stirrer/stirrer guide, nitrogen inlet and outlet was charged with 4,4'-difluorobenzophenone (88.85g, 0.407 mole), 4,4'-dihydroxybenzophenone (38.56g, 0.18 mole), 1,3-dihydroxybenzene (24.22g, 0.22 mole) and
25 diphenylsulphone (320g) and purged with nitrogen for over 1 hour. The contents were then heated under a nitrogen blanket to between 140 and 150°C to form an almost colourless solution. While maintaining a nitrogen blanket, dried sodium carbonate (42.39g, 0.400 mole) and
30 dried potassium carbonate (1.10g, 0.008 mole) were added. The temperature was raised gradually to 320°C over 3 hours and then maintained for 1.5 hours.

The reaction mixture was allowed to cool, milled and washed with acetone and water. The resulting polymer was dried in an air oven at 120°C. The polymer had a melt viscosity of 1.00kNsm⁻².

5

A similar polymer to example 1a was made by altering the mole ratios of the reactants. The details are included in the table below.

Example	Polymer Composition mole ratio			MV (kNsm ⁻²)
	BDF	DHB	Resorcinol	
1b	1.017	0.705	0.295	0.43

10

Example 2a - Synthesis of PEmEK/PEK/PEKES

A 700ml flanged flask fitted with a ground glass Quickfit lid, stirrer/stirrer guide, nitrogen inlet and outlet was charged with 4,4'-difluorobenzophenone (88.85g, 0.407 mole), 1,3-dihydroxybenzene (24.75g, 0.225 mole), 4,4'-dihydroxybenzophenone (15.01g, 0.07 mole), 4,4'-dihydroxydiphenylsulphone (26.31g, 0.105 mole) and diphenylsulphone (320g) and purged with nitrogen for over 1 hour. The contents were then heated under a nitrogen blanket to between 140 and 150°C to form an almost colourless solution. While maintaining a nitrogen blanket, dried sodium carbonate (43.24g, 0.408 mole) and dried potassium carbonate (0.28g, 0.002 mole) were added. The temperature was raised gradually to 320°C over 3 hours and then maintained for 1.5 hours.

The reaction mixture was allowed to cool, milled and washed with acetone and water. The resulting polymer was

dried in an air oven at 120°C. The polymer had a melt viscosity at 400°C, 1000sec⁻¹ of 1.3kNsm⁻².

Similar polymers to example 2a were made by altering the mole ratios of the reactants. The details are included in the table below.

Example	Polymer Composition mole ratio				MV (kNsm ⁻²)
	BDF	DHB	Res	Bis-S-	
2b	1.017	0.42	0.3	0.28	0.55
2c	1.017	0.18	0.7	0.12	0.45
2d	1.017	0.56	0.3	0.14	0.37
2e	1.017	0.36	0.55	0.09	0.40
2f	1.017	0.280	0.305	0.415	1.3

Example 3 - Synthesis of PEDEK/PEK/PEKES

10.

A 700ml flanged flask fitted with a ground glass Quickfit lid, stirrer/stirrer guide, nitrogen inlet and outlet was charged with 4,4'-difluorobenzophenone (89.03g, 0.408 mole), 4,4'-dihydroxybenzophenone (11.43g, 0.053 mole), 4,4'-dihydroxydiphenylsulphone (53.42g, 0.214 mole) and 4,4'-dihydroxybiphenyl (24.80g, 0.133 mole) and diphenylsulphone (320g) and purged with nitrogen for over 1 hour. The contents were then heated under a nitrogen blanket to between 140 and 150°C to form an almost colourless solution. While maintaining a nitrogen blanket, dried sodium carbonate (43.23g, 0.408 mole) and dried potassium carbonate (0.40g, 0.003 mole) were added. The temperature was raised gradually to 320°C over 3 hours and then maintained for 2 hours.

25

The reaction mixture was allowed to cool, milled and washed with acetone and water. The resulting polymer was dried in an air oven at 120°C. The polymer had a melt viscosity at 400°C, 1000sec⁻¹ of 0.49kNsm⁻².

5

Example 4 - Sulphonation to afford exclusively monosulphonated PEmEK rings

A sample of polymer from example 2a was dissolved in 98% concentrated acid. The solution was stirred at room temperature for 24 hours. Thereafter, the reaction solution was allowed to drop into stirred de-ionised water. Sulphonated polymer precipitated as free-flowing beads. Recovery was by filtration, followed by washing with de-ionised water and subsequent drying.

The beads were found to have an EW of 690 corresponding to double the theoretical EW of 345, for di-sulphonation of all PEmEK units. EW results and 1H NMR spectroscopy showed that the PEmEK rings had undergone exclusively monosulphonation.

Example 5 - Sulphonation to produce between 1 and 2 sulphonic acid moieties on each 1,3-oxysubstituted phenylene ring

Selected polymers from Examples 1-3 were sulphonated by stirring each polymer in 98% sulphuric acid (7.50g of polymer/100g sulphuric acid) for various time periods and temperatures. Thereafter, the reaction solution was allowed to drip into stirred de-ionised water. Sulphonated polymer precipitated as free-flowing beads.

Recovery was by filtration, followed by washing with de-ionised water and subsequent drying.

The measured and theoretical EW's of the polymers
 5 sulphonated under these conditions are shown in the table below. In some examples, the sulphonation time or temperature was increased to produce a larger number of di-sulphonated PEmEK units. Additionally, the table details the percentage of di-sulphonated resorcinol
 10 moieties, determined as described in Example 6.

Sulphonated Polymer from Example	Theoretical EW+	Temp (°C)	Time (hours)	Measured EW (by titration)	Percentage of di-sulphonated resorcinol moieties (by EW or NMR)
2f	690	65	8	1053	48%
1b	690	65	60	890	83%
2b	690	80	8	752	91%
3	690	65	8	692	N/A


N/A - Not Applicable

+ Based on a fully di-sulphonated PEmEK Unit (except for
 15 Example 3 which has no such unit)


It should be noted that 98% sulphuric acid is unable to sulphonate PEK units in the polymers due to the deactivation of the phenyl ring of the PEK unit by the
 20 attached ketone group.

Example 6 - General procedure for calculating percentage di-sulphonation by proton NMR

- 5 The NMR determination of the level of di-sulphonation was derived by ratioing the integral of the peak at 6.5ppm divided by half the integral of the peak at 6.75 plus the integral of the peak at 6.5ppm). The resonance at 6.5ppm corresponds to the proton placed between two ether
- 10 linkages which experiences significant electron shielding from the ether linkages and the meta directing effect of both sulphonic acid groups (Scheme 1b). The proton signal at 6.7ppm represents both protons in a mono-sulphonated 1,3-ether linked phenylene as indicated in Scheme 1a and
- 15 shown in the NMR spectrum of a SPemEK/PEK copolymer (see Figure 2).

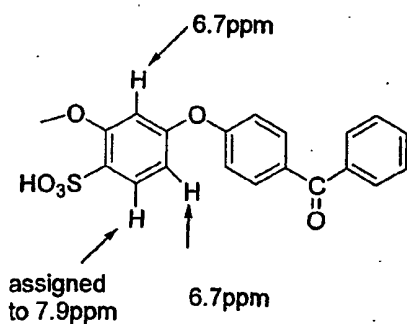

Scheme 1(a)

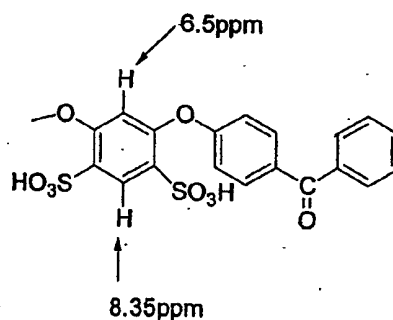

Scheme 1(b)

- 20 Complete di-sulphonation can be confirmed by comparing the actual EW to the theoretical EW providing that no signal at 6.7ppm is present, or alternatively by ratioing the signal at 6.5ppm with the other proton signals from the polymer.

Example 7 - Sulphonation with increased acid concentrations

A sample of polymer from example 2f was dissolved in 98% concentrated acid. To the solution was added 20% oleum in concentrated sulphuric acid to make the concentration of the concentrated sulphuric acid solution 99%. The solution was heated with stirring at 65°C for 8 hours. Thereafter, the reaction solution was allowed to drip into stirred de-ionised water. Sulphonated polymer precipitated as free-flowing beads. Recovery was by filtration, followed by washing with de-ionised water and subsequent drying.

The above procedure afforded polymer with an EW of 803 (83.6% disulphonation from EW results). IR analysis did not reveal the presence of sulphonated PEK rings.

Example 8 - Sulphonation to afford exclusively di-sulphonated PEmEK rings

A sample of polymer from example 2f was dissolved in 98% concentrated acid. To the solution was added 20% oleum in concentrated sulphuric acid to make the concentration of the concentrated sulphuric acid solution 100%. The solution was heated with stirring at 35°C for 8 hours. Thereafter, the reaction solution was cooled to room temperature and allowed to drip into stirred de-ionised water. Sulphonated polymer precipitated as free-flowing beads. Recovery was by filtration, followed by washing with de-ionised water and subsequent drying.

The beads were found to have an EW corresponding to the theoretical EW of 690. Examination of the beads by ^1H NMR spectroscopy (i.e. determining the ratio of the protons corresponding to the di-sulphonated and monosulphonated meta substituted ether-phenylene-ether rings) suggested that all PEmEK moieties within the polymer chain had been exclusively di-sulphonated such that where a 1,3-oxy-phenylene-oxy linkage occurred, sulphonic acid groups were present at the 4- and 6- positions. Furthermore, the IR spectrum of the polymer did not contain a stretch associated with sulphonic acid groups on -ether-phenylene-ketone moieties, thereby confirming that no PEK or PEKES units had undergone sulphonation.

Example 9 - Sulphonation of PEK in 100% sulphuric acid at 35°C

A sample of PEK polymer was dissolved in 98% concentrated acid. To the solution was added 20% oleum in concentrated sulphuric acid to make the concentration of the concentrated sulphuric acid solution 100%. The solution was heated with stirring at 35°C for 8 hours. Thereafter, the reaction solution was cooled to room temperature and allowed to drip into stirred de-ionised water. The polymer precipitated as free-flowing beads. Recovery was by filtration, followed by washing with de-ionised water and subsequent drying.

The EW of the beads could not be measured since a positive phenolphthalein test result was immediately observed on addition of sodium hydroxide, suggesting that the polymer had not undergone sulphonation. Furthermore, the IR spectrum of the polymer did not contain a stretch

associated with sulphonic acid groups on -ether-phenylene-ketone moieties, thereby confirming that no PEK units had undergone sulphonation.

5 Example 10 - Sulphonation of PEMEK/PEK/PEKES in 100% sulphuric acid at 45°C

A sample of polymer from example 2f was dissolved in 98% concentrated acid. To the solution was added 20% oleum in
10 concentrated sulphuric acid to make the concentration of the concentrated sulphuric acid solution 100%. The solution was heated with stirring at 45°C for 8 hours. Thereafter, the reaction solution was cooled to room temperature and allowed to drip into stirred de-ionised
15 water. The sulphonated polymer precipitated as free-flowing beads. Recovery was by filtration, followed by washing with de-ionised water and subsequent drying.

The EW of the polymer was determined as 683, however
20 analysis of the polymer by infrared spectroscopy showed clear evidence that the PEK units had undergone sulphonation.

25 Example 11 - Sulphonation of PEMEK/PEK/PEKES in 100% sulphuric acid at room temperature

A sample of polymer from example 2f was dissolved in 98% concentrated acid. To the solution was added 20% oleum in concentrated sulphuric acid to make the concentration of
30 the concentrated sulphuric acid solution 100%. The solution was stirred at room temperature for 24 hours. Thereafter, the reaction solution was cooled to room temperature and allowed to drip into stirred de-ionised

water. The polymer precipitated as free-flowing beads. Recovery was by filtration, followed by washing with de-ionised water and subsequent drying.

- 5 Analysis of the polymer by NMR suggested that only 66% of the PEMEK rings had been disulphonated.

Example 12 Sulphonation of PEK with greater than 100% Sulphuric Acid

10

A sample of PEK polymer was dissolved in 98% concentrated acid. To the solution was added 20% oleum in concentrated sulphuric acid to make the concentration of the concentrated sulphuric acid solution >100%. The solution
15 was heated with stirring at 50°C for 1 hour and 10 minutes hours. Thereafter, the reaction solution was cooled to room temperature and allowed to drip into stirred de-ionised water. The sulphonated polymer precipitated as free-flowing beads. Recovery was by filtration, followed
20 by washing with de-ionised water and subsequent drying.

The EW of the polymer was determined as 845.

Example 13 - Sulphonation of PEEK in 98% sulphuric acid at
25 65°C

A sample of PEEK polymer was dissolved in 98% concentrated acid. The solution was heated with stirring at 65°C for 1 hour and 30 minutes. Thereafter, the reaction solution
30 was cooled to room temperature and allowed to drip into stirred de-ionised water. The sulphonated polymer precipitated as free-flowing beads. Recovery was by

filtration, followed by washing with de-ionised water and subsequent drying.

The EW of the polymer was determined as 557.

5

Example 14 - Thermal stability experiments

The thermal stability of selected sulphonated polymers was determined by placing the sulphonated polymer beads in a PTFE-lined flask and exposing the beads to temperatures of 200°C in air, for a period of 1 hour and 45 minutes. The beads were then subjected to EW testing to determine the loss of ion exchange sites after thermal treatment at these temperatures. The results from these experiments are shown in the table below.

10

15

Sulphonated polymer from specified example or named polymer	Level of sulphonation	Original EW	EW after thermal treatment	% change
12	Mono-sulphonated rings stabilised by carbonyl	845	985	17%
13	Mono-sulphonated rings	557	687	23%
2d	Majority of PEmEK rings di-sulphonated (>85%) but some monosulphonated rings present	799	810	1.4%
2f	PEmEK rings fully di-sulphonated	690	699	1.3%
2a	Monosulphonated PEmEK rings	715	904	26%

Attention is directed to all papers and documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.


All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

Each feature disclosed in this specification (including any accompanying claims, abstract and drawings) may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

The invention is not restricted to the details of the foregoing embodiment(s). The invention extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

Claims

1. A polymer electrolyte membrane or gas diffusion electrode which includes an ion-conducting polymeric material which includes moieties of formula

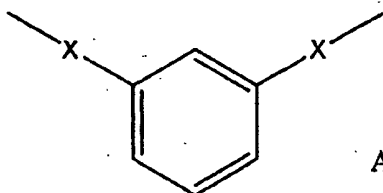

which are substituted on average with more than 1 and 3 or less groups (e.g. sulphonate groups) which provide ion-exchange sites and hydrogen atoms of said moieties are optionally substituted, wherein each X in said moieties of formula A independently represent an oxygen or sulphur atom.


15

2. A membrane or an electrode according to claim 1, wherein said moieties are substituted on average with 1.8 to 2.2 of said groups which provide ion-exchange sites.

- 20 3. A membrane or an electrode according to claim 1 or claim 2, wherein said ion conducting polymeric material is of a type which includes:


- (i) phenyl moieties;
- 25 (ii) carbonyl and/or sulphone moieties; and
- (iii) ether and/or thioether moieties.

4. A membrane or an electrode according to any preceding claim, wherein said ion conducting polymeric material includes a moiety of formula




5

and/or a moiety of formula














10

and/or a moiety of formula




15 wherein at least some of the units I, II and/or III are functionalised to provide ion-exchange sites, wherein unit A is a part of units I, II and/or III, wherein the phenyl moieties in units I, II, and III are independently optionally substituted and optionally cross-linked; and
 20 wherein m, r, s, t, v, w and z independently represent zero or a positive integer, E and E' independently represent an

oxygen or a sulphur atom or a direct link, G represents an oxygen or sulphur atom, a direct link or a -O-Ph-O- moiety where Ph represents a phenyl group and Ar is selected from one of the following moieties (i)* or (i) to (x) which is bonded via one or more of its phenyl moieties to adjacent moieties




5. A membrane or an electrode according to any preceding claim, wherein said ion-conducting polymeric material is sulphonated.
- 5 6. A membrane or an electrode according to any preceding claim, wherein said polymeric material is a homopolymer having a repeat unit of general formula



or a homopolymer having a repeat unit of general formula


10



or a random or block copolymer of at least two different units of IV and/or V provided that repeat units (or parts of repeat unit) are functionalised to provide ion-exchange sites;


15

or a homopolymer having a repeat unit of general formula



or a homopolymer having a repeat unit of general formula

20



or a random or block copolymer of at least two different units of IV* and/or V* provided that one or more repeat units (or parts of repeat units) are functionalised to provide ion-exchange sites;


5

wherein A, B, C, and D independently represent 0 or 1 and E, E', G, Ar, m, r, s, t, v, w and z are as described in claim 4.

10 7. A membrane or an electrode according to any preceding claim, wherein said ion-conducting polymeric material is crystalline or crystallisable.

8. A membrane or an electrode according to any preceding
15 claim, wherein said polymeric material includes at least some ketone moieties in the polymeric chain.

9. A membrane or an electrode according to any preceding
20 claim, wherein said ion-conducting polymeric material includes a repeat unit of formula

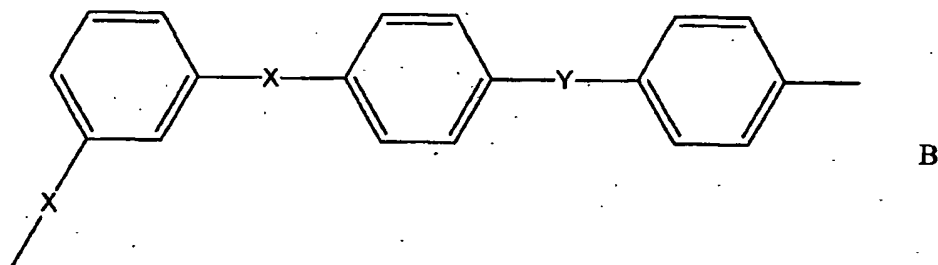

wherein the 1,3- substituted -X-Phenyl-X- moiety is
25 substituted on average with more than 1 and 3 or fewer groups which provide ion-exchange sites, each X independently represents an oxygen or sulphur atom and Y represents a carbonyl or sulphone group.

10. A membrane or an electrode according to claim 9, wherein Y represents a carbonyl group and X represents an oxygen atom.

5

11. A membrane or an electrode according to any preceding claim, wherein any -O-phenyl-CO or -O-phenyl-SO₂ moieties in said ion-conducting polymeric material are functionalised with ion-exchange sites to a level of less than 10 mole%.

10

12. A membrane or an electrode according to any preceding claim, wherein the only moieties in said ion-conducting polymeric material which are functionalised with ion exchange sites are moieties A.

15

13. A membrane or an electrode according to any preceding claim, wherein substantially 100 mole% of moieties A are difunctionalised.

20

14. A membrane or an electrode according to any preceding claim, wherein said ion conducting polymeric material is a copolymer comprising a first repeat unit which is selected from the following:

25

(a) a unit of formula IV wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (iv), m and s represent zero, w represents 1 and A and B represent 1 provided that said unit includes moiety A, with both X atoms being oxygen atoms;

30

(b) a unit of formula V wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (v), m and s represent zero, w represents 1 and A and B represent 1 provided that said unit includes moiety A, with both X atoms being oxygen atoms;

and a second repeat unit selected from one of the following:

10 (c) a unit of formula IV wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (iv), m and s represent zero, w represents 1 and A and B represent 1;

15 (d) a unit of formula IV wherein E represents an oxygen atom, E' represents a direct link, Ar represents a moiety of structure (i), m represents zero, A represents 1, B represents zero;

20 (e) a unit of formula V wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (iv), m and v represent zero, z represents 1 and C and D represent 1;

25 (f) a unit of formula V wherein E represents an oxygen atom, E' represents a direct link, Ar represents a moiety of structure (ii), m represents 0, C represents 1, D represents 0;

30 (g) a unit of formula V wherein E and E' represents an oxygen atom, Ar represents a structure (i), m represents 0, C represents 1, Z represents 1, G represents a direct link, v represents 0 and D represents 1;

- (h) a unit of formula IV wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (iv), m represents 1, w represents 1, s represents zero, A and B represent 1;
- (i) a unit of formula IV wherein E represents an oxygen atom, E' is a direct link, G represents a direct link, Ar represents a moiety of structure (iv), m and s represent zero, w represent 1, A and B represent 1;
- (j) a unit of formula V wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (iv), m represents 1, z represents 1, v represents 0, C and D represent 1;
- (k) a unit of formula V wherein E represents an oxygen atom, E' represents a direct link, G represents a direct link, Ar represents a moiety of structure (iv), m and v represent zero, z represents 1, C and D represent 1;
- (l) a unit of formula IV wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (v), m represents 0, w represents 1, s represents 0, A and B represent 1;
- (m) a unit of formula V wherein E and E' represent oxygen atoms, G represents a direct link, Ar represents a moiety of structure (v), m represents 0, z represents 1, v represents 0, C and D represent 1.
15. A membrane or an electrode according to claim 14, wherein said ion-conducting polymeric material includes a

first unit selected from (a) or (b) in combination with a second unit selected from (d) or (f) optionally in combination with unit (g).

5 16. A membrane or an electrode according to claim 14, wherein said ion-conducting polymeric material comprises unit (a) in combination with unit (d); unit (a) in combination with units (d) and (g); unit (b) in combination with unit (f); and unit (b) in combination
10 with units (f) and (g).

17. A membrane or an electrode according to any preceding claim, wherein said polymer electrolyte membrane has an equivalent weight (EW) of less than 500g/mol.

15

18. A fuel cell or electrolyser incorporating a polymer electrolyte membrane according to any of claims 1 to 17.

19. An ion conducting polymeric material as described in
20 any of claims 1 to 17 per se.

20. A method of making a sulphonated ion-conducting polymeric material as described in any preceding claim, the method comprising contacting a polymeric material
25 which includes a repeat unit of formula A according to claim 1 with a sulphonating agent thereby to substitute the repeat unit on average with more than 1 and 3 or fewer sulphonate groups.

30 21. A method according to claim 20, wherein said conditions for controllably sulphonating the polymeric material involve the use of sulphuric acid at a concentration of at least 99.5%.

22. A method according to claim 21, wherein the sulphuric acid concentration is less than 100.1%.
- 5 23. A method according to claim 21 or claim 22, wherein the temperature during sulphonation is 30°C or above.
24. A method according to any of claims 20 to 23, wherein the temperature during said sulphonation is 40°C or less.
- 10 25. A method according to claim 23 or claim 24, wherein the selected temperature or temperature range is maintained for at least 2 hours and for less than 20 hours.
- 15 26. A method according to any of claims 20 to 25, which is carried out by use of 99.8% to 100% sulphuric acid at 34 to 36°C.


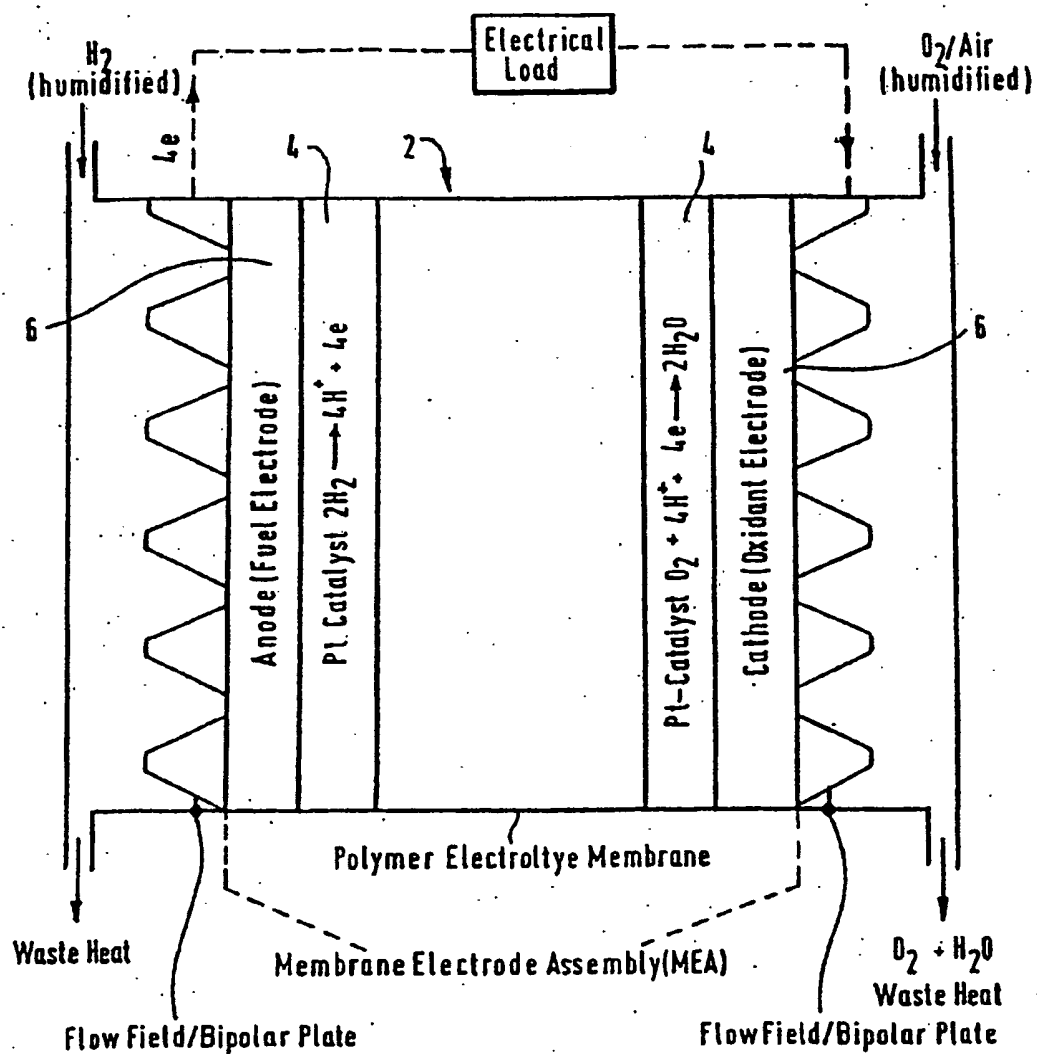


FIG.1.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

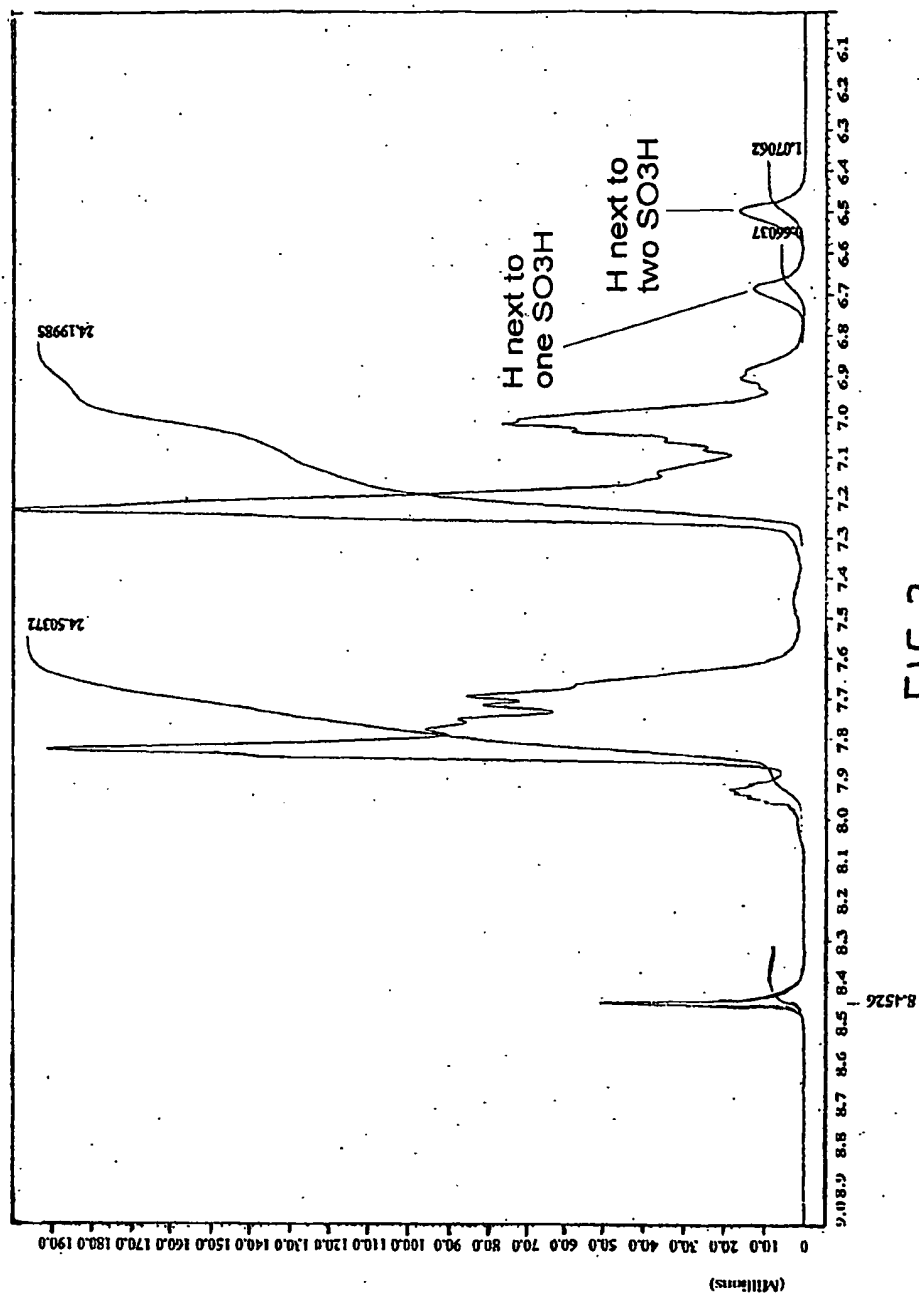


(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088778 A3

- (51) International Patent Classification⁷: **H01M 8/10, 4/86**
- (21) International Application Number:
PCT/GB2004/001401
- (22) International Filing Date: 1 April 2004 (01.04.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0307623.9 2 April 2003 (02.04.2003) GB
- (71) Applicant (for all designated States except US): **VICTREX MANUFACTURING LIMITED** [GB/GB]; Victrex Technology Centre, Hillhouse International, Thornton Cleveleys, Lancashire FY5 4QD (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **CHARNOCK, Peter** [GB/GB]; 7 Elvaston Road, Carleton, Poulton-Le-Fylde, Lancashire FY6 7TH (GB). **DEVINE, John, Neil** [GB/GB]; 32 Sheringham Way, Poulton Le Fylde, Lancashire FY6 7EE (GB). **WILSON, Brian** [GB/GB]; 1 White Lea, Cabus, Garstang, Lancashire PR3 1JG (GB).
- (74) Agents: **NEILL, Alastair, William et al.**; Appleyard Lees, 15 Clare Road, Halifax HX1 2HY (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- (88) Date of publication of the international search report:
16 June 2005
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POLYMERIC MATERIALS

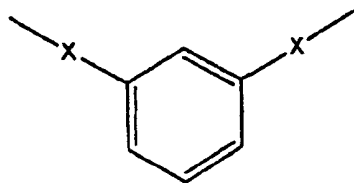

(A)

(57) Abstract: A polymer electrolyte membrane or gas diffusion electrode includes an ion-conducting polymeric material which includes moieties of formula (A) which are substituted on average with more than 1 and 3 or fewer groups (e.g. sulphonate groups) which provide ion-exchange sites and hydrogen atoms of said moieties are optionally substituted, wherein each X in said moieties of formula A independently represent an oxygen or sulphur atom. The ion conducting polymeric material is suitably prepared by controllably sulphonating a polymeric material using about 100% sulphuric acid at 34°C to 36°C.

WO 2004/088778 A3

INTERNATIONAL SEARCH REPORT

Inten I Application No
PCT/GB2004/001401

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01M8/10 H01M4/86

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01M C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, COMPENDEX, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 362 836 A (HELMER-METZMANN ET AL) 8 November 1994 (1994-11-08) column 2, lines 13-35	1-26
X	WO 01/19896 A (VICTREX MANUFACTURING LIMITED; WILSON, BRIAN; KEMMISH, DAVID, JOHN; CH) 22 March 2001 (2001-03-22) page 5, line 27	1-23
X	US 4 273 903 A (ROSE ET AL) 16 June 1981 (1981-06-16) claims 1-6; example 12	1-13, 19-26
X	EP 0 382 440 A (IMPERIAL CHEMICAL INDUSTRIES PLC) 16 August 1990 (1990-08-16) page 2, line 46 - page 3, line 51	1-13, 18-20
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

14 March 2005

Date of mailing of the international search report

24/03/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Reich, C

INTERNATIONAL SEARCH REPORT

Inten ☐ Application No
PCT/GB2004/001401

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>KIM Y S ET AL: "Fabrication and characterization of heteropolyacid (H3PW12O40)/directly polymerized sulfonated poly(arylene ether sulfone) copolymer composite membranes for higher temperature fuel cell applications" JOURNAL OF MEMBRANE SCIENCE, ELSEVIER SCIENTIFIC PUBL.COMPANY. AMSTERDAM, NL, vol. 212, no. 1-2, 15 February 2003 (2003-02-15), pages 263-282, XP004402835 ISSN: 0376-7388 page 265, column 1, <u>paragraph 2</u></p>	1-26

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB2004/001401

Box II Observations where certain claims were found unsearchable (Continuation of Item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 1-26 (all in part)
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of Item 3 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/GB2004 /001401

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.2

Claims Nos.: 1-26 (all in part)

Present claims 1-26 relate to an extremely large number of possible polymers and products derived therefrom. Support within the meaning of Article 6 PCT and/or disclosure within the meaning of Article 5 PCT is to be found, however, for only a very small proportion of the products claimed. In the present case, the claims so lack support, and the application so lacks disclosure, that a meaningful search over the whole of the claimed scope is impossible. Consequently, the search has been carried out for those parts of the claims which appear to be supported and disclosed, namely those parts relating to the sulphonated polyarylether ketones described in the examples and closely related compounds in polymer electrolyte membrane or gas diffusion electrode materials and methods of their production.

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guideline C-VI, 8.5), should the problems which led to the Article 17(2) declaration be overcome.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB2004/001401

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5362836	A	08-11-1994	CA 2098159 A1	12-12-1993
			DE 59310005 D1	18-05-2000
			EP 0575807 A1	29-12-1993
			JP 6049202 A	22-02-1994
			SG 46643 A1	20-02-1998
WO 0119896	A	22-03-2001	AU 764333 B2	14-08-2003
			AU 5750999 A	03-04-2000
			AU 778365 B2	02-12-2004
			AU 7025000 A	17-04-2001
			CA 2343184 A1	23-03-2000
			CA 2382144 A1	22-03-2001
			EP 1228122 A1	07-08-2002
			EP 1112301 A1	04-07-2001
			WO 0119896 A1	22-03-2001
			JP 2002524631 T	06-08-2002
			JP 2003509554 T	11-03-2003
			US 6828353 B1	07-12-2004
US 4273903	A	16-06-1981	DE 2964541 D1	24-02-1983
			DE 2964904 D1	31-03-1983
			DE 2966289 D1	10-11-1983
			EP 0008894 A1	19-03-1980
			EP 0008895 A1	19-03-1980
			EP 0029633 A2	03-06-1981
			JP 3021333 A	30-01-1991
			JP 1512209 C	09-08-1989
			JP 55036296 A	13-03-1980
			JP 63051174 B	13-10-1988
			JP 1390886 C	23-07-1987
			JP 55048222 A	05-04-1980
			JP 61036781 B	20-08-1986
			JP 1650209 C	30-03-1992
			JP 3012094 B	19-02-1991
			JP 62089730 A	24-04-1987
			JP 1584173 C	22-10-1990
			JP 59074128 A	26-04-1984
			JP 62028169 B	18-06-1987
			JP 1594860 C	27-12-1990
			JP 2017571 B	20-04-1990
			JP 61043630 A	03-03-1986
			US 4268650 A	19-05-1981
EP 0382440	A	16-08-1990	AU 4907490 A	16-08-1990
			CA 2009323 A1	08-08-1990
			EP 0382440 A1	16-08-1990
			JP 3014841 A	23-01-1991

THIS PAGE BLANK (USPTO)